


PIPE SCREW JOINTS A MALE STUD COUPLINGS

A MALE STUD COUPLING BSP WD

BSP parallel.

Captive seal NBR (e.g. Perbunan),
FPM (e.g. Viton) upon request.

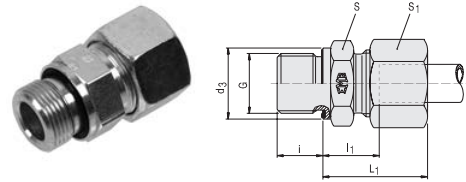

description	pipe OD	PN series	S	S ₁	L ₁	L	d ₃	i	G	kg % pc
DS-A 6-RL/WD	6	L 500 (2200)	14	14	23	8.5	14	8	G 1/8" A	2.5
DS-A 6-L/R 1/4"/WD	6	L 500 (2200)	19	14	25	10.0	19	12	G 1/4" A	3.9
DS-A 8-RL/WD	8	L 500 (2200)	19	17	25	10.0	19	12	G 1/4" A	4.5
DS-A 8-L/R 1/8"/WD	8	L 500 (2200)	14	17	23	8.5	14	8	G 1/8" A	2.9
DS-A 8-L/R 3/8"/WD	8	L 500 (2200)	22	17	26	11.5	22	12	G 3/8" A	5.9
DS-A 10-RL/WD	10	L 500 (2200)	19	19	26	11.0	19	12	G 1/4" A	4.7
DS-A 10-L/R 3/8"/WD	10	L 500 (2200)	22	19	27	12.5	22	12	G 3/8" A	6.2
DS-A 10-L/R 1/2"/WD	10	L 500 (2200)	27	19	28	13.0	27	14	G 1/2" A	9.2
DS-A 12-RL/WD	12	L 400 (1700)	22	22	27	12.5	22	12	G 3/8" A	6.9
DS-A 12-L/R 1/4"/WD	12	L 400 (1700)	19	22	27	12.0	19	12	G 1/4" A	5.8
DS-A 12-L/R 1/2"/WD	12	L 400 (1700)	27	22	28	13.0	27	14	G 1/2" A	9.4
DS-A 15-RL/WD	15	L 400 (1700)	27	27	29	14.0	27	14	G 1/2" A	11.5
DS-A 15-L/R 3/8"/WD	15	L 400 (1700)	24	27	29	13.5	22	12	G 3/8" A	9.7
DS-A 18-RL/WD	18	L 400 (1700)	27	32	31	14.5	27	14	G 1/2" A	13.2
DS-A 18-L/R 3/4"/WD	18	L 400 (1700)	32	32	31	14.5	32	16	G 3/4" A	17.4
DS-A 22-RL/WD	22	L 250 (1100)	32	36	33	16.5	32	16	G 3/4" A	18.5
DS-A 28-RL/WD	28	L 250 (1100)	41	41	34	17.5	40	18	G 1" A	25.9
DS-A 35-RL/WD	35	L 250 (1100)	50	50	39	17.5	50	20	G 1 1/4" A	42.2
DS-A 42-RL/WD	42	L 250 (1100)	55	60	42	19.0	55	22	G 1 1/2" A	56.9
DS-A 6-RS/WD	6	S 800 (3400)	19	17	28	13.0	19	12	G 1/4" A	5.0
DS-A 8-RS/WD	8	S 800 (3400)	19	19	30	15.0	19	12	G 1/4" A	5.5
DS-A 8-S/R 3/8"/WD	8	S 800 (3400)	22	19	30	15.5	22	12	G 3/8" A	7.8
DS-A 10-RS/WD	10	S 800 (3400)	22	22	31	15.0	22	12	G 3/8" A	8.8
DS-A 10-S/R 1/4"/WD	10	S 800 (3400)	19	22	31	14.5	19	12	G 1/4" A	7.3
DS-A 10-S/R 1/2"/WD	10	S 800 (3400)	27	22	34	17.5	27	14	G 1/2" A	12.9
DS-A 12-RS/WD	12	S 630 (2700)	22	24	33	17.0	22	12	G 3/8" A	10.0
DS-A 12-S/R 1/4"/WD	12	S 630 (2700)	22	24	33	16.5	19	12	G 1/4" A	9.3
DS-A 12-S/R 1/2"/WD	12	S 630 (2700)	27	24	34	17.5	27	14	G 1/2" A	13.6
DS-A 14-RS/WD	14	S 630 (2700)	27	27	37	19.0	27	14	G 1/2" A	14.8
DS-A 16-RS/WD	16	S 630 (2700)	27	30	37	18.5	27	14	G 1/2" A	16.1
DS-A 16-S/R 3/8"/WD	16	S 630 (2700)	27	30	36	18.0	22	12	G 3/8" A	15.2
DS-A 16-S/R 3/4"/WD	16	S 630 (2700)	32	30	39	20.5	27	16	G 3/4" A	22.2
DS-A 20-RS/WD	20	S 400 (1700)	32	36	42	20.5	32	16	G 3/4" A	25.3
DS-A 25-RS/WD	25	S 400 (1700)	41	46	47	23.0	40	18	G 1" A	46.5
DS-A 25-S/R 1/2"/WD	25	S 400 (1700)	41	46	47	23.0	27	14	G 1/2" A	45.0
DS-A 30-RS/WD	30	S 400 (1700)	50	50	50	23.5	50	20	G 1 1/4" A	63.5
DS-A 38-RS/WD	38	S 400 (1700)	55	60	57	26.0	55	22	G 1 1/2" A	87.0

L₁ = approximate length with nut tightened

Please see "Engineering and technical data - Selecting the correct tube fitting" for more information on pressure.